


MANURE BELT CONVEYOR

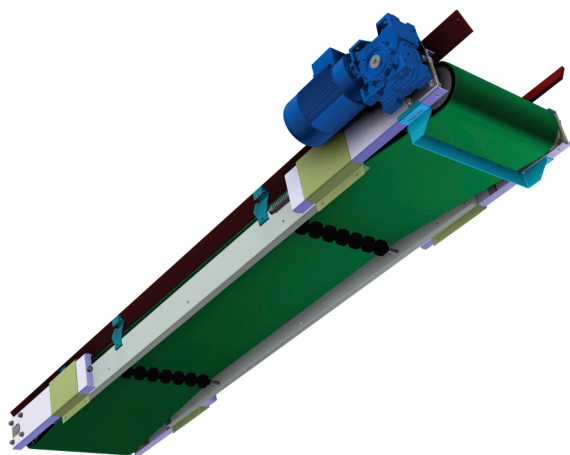

- Belt conveyors for manure removal in different width and length.
- Solution according to customer's requirements.

KOVBEL, výrobní družstvo, Cihlářská 503, 344 01 Domažlice, Czech Republic
Tel.: +420 379 724 441, Fax: +420 379 722 552, E-mail: kovobel@kovobel.cz


www.kovobel.cz




Manure removal

Belt conveyor for poultry manure stripping has modular design. Conveyor length is variable from 3 to 30 m. Belt width is 500 or 650 mm. Horizontal conveyor transports manure outside from animal house. Slope conveyor transports manure to the container.


Technical data		
Belt width	500 mm	650 mm
Conveyor length	3 – 30 m	3 – 30 m
Belt speed	35 m/min	35 m/min
Max. slope - smooth belt	25°	25°
Max. slope - belt with catch cams	40°	40°
Motor input	1,5 – 2 x 2,2 kW	1,5 – 2 x 2,2 kW

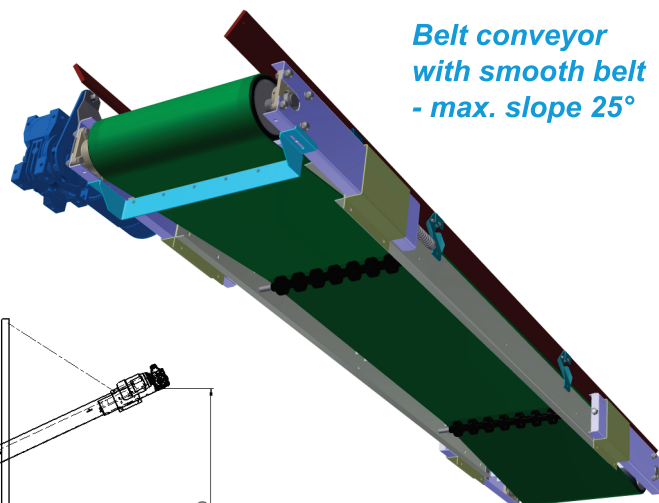

Belt conveyor with smooth belt - max. slope 25°

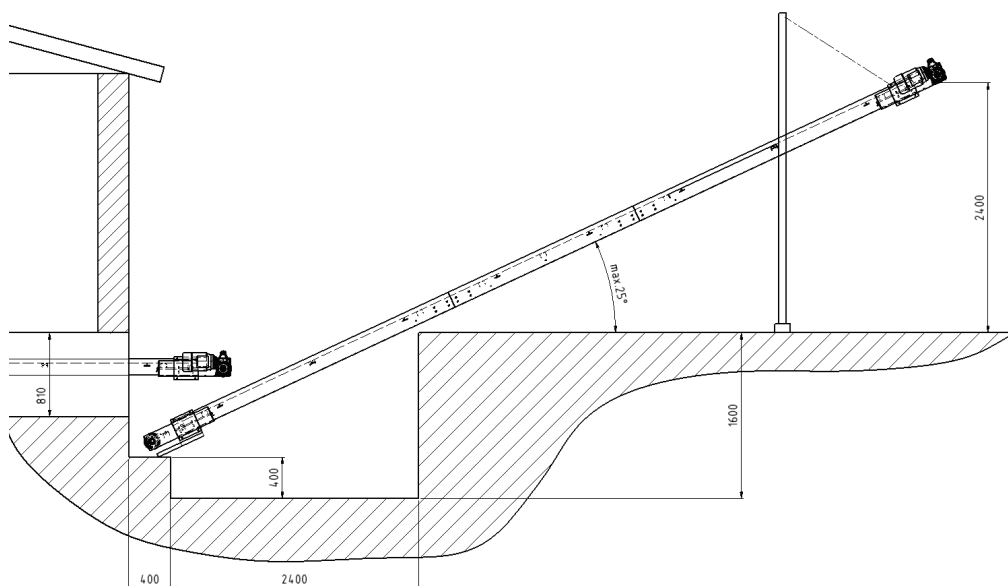


Belt with catch cams

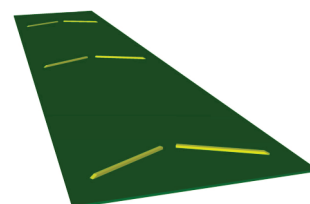

... for max. slope up to 40°

Swan-neck manure conveyor

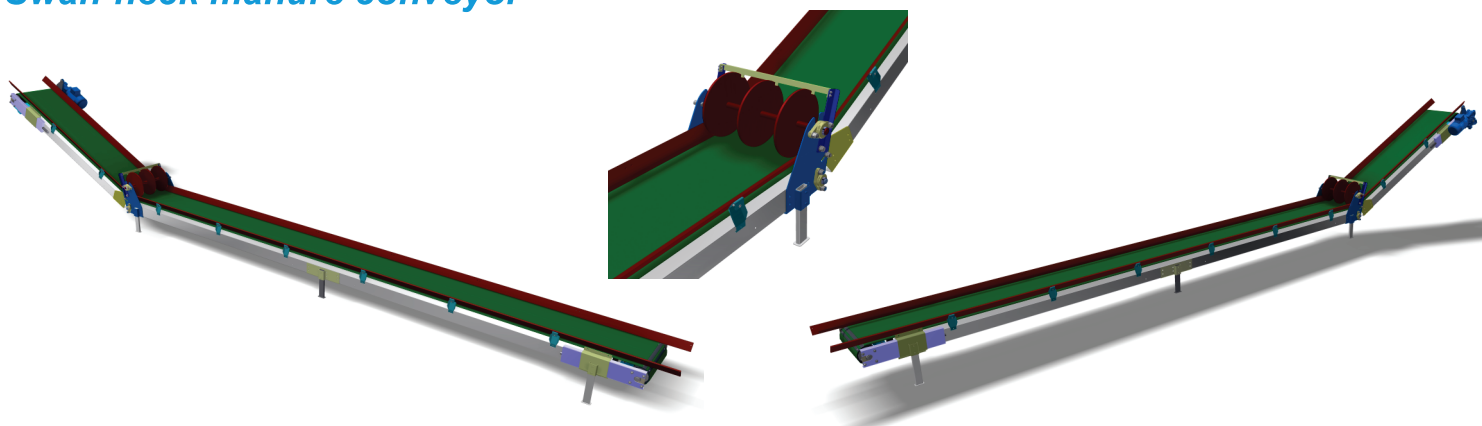

- Swan-neck conveyor is compact solution for manure removal.
- Good service and maintenance of the equipment.